


LTE Hybrid

LTE-parameter	
IMEI	[REDACTED]
IMSI	[REDACTED]
Device Status	Attached
SIM Card Status	SIM OK
Antenna Mode	Automatically select antenna, both antenna selete to external
Physical Cell ID	239
Cell ID	28385538
RSRP	-68
RSRQ	-10
Service Status	Effective service
TAC	13500

Bonding TR-181

TR181 Parameter	
Enable	1
Status	Online
BondingMode	LTEDSL
BondingInterface	Device.IP.Interface.5
BondingServerName	haap.t-online.de
BondingServerIPAddress	2003:6:3200:100::1
RTTSwitch	0
CurrentRTT	0
RTTthreshold	0
BWCalculationInterval	10
AvailableBW	2661
LastErrorInfo	None
InterfaceNumberOfEntries	2
HelloStatus	IdleHello
HelloInterval	10
IdleHelloInterval	1000
HelloRetryTimes	10
IdleHelloTrafficInterval	180

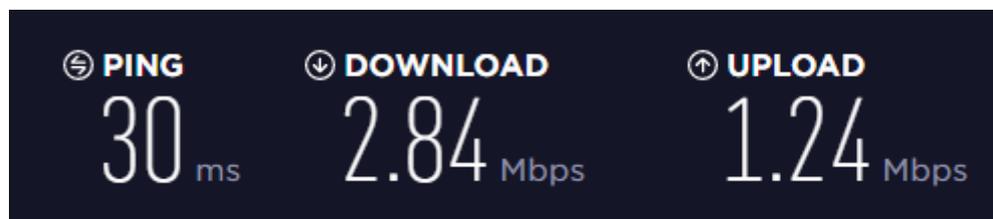


Only DSL

DSL

Connection Status	
DSL operating-mode	ADSL_2plus
Path mode	None
State	Up
Training results	Showtime
Mode LO/I2	L0
VPI/VCI	1/32

Line Status		
	Upstream	Downstream
Actual Data Rate	1479	3449
Attainable Data Rate	1472	5892
SNR Margin	56	66
Signal-level	131	0
Line Attenuation	224	575

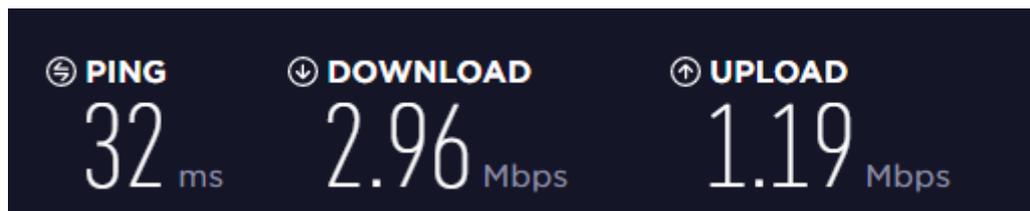

Only LTE

DSL

Connection Status	
DSL operating-mode	
Path mode	
State	NoSignal
Training results	
Mode LO/I2	
VPI/VCI	1/32

Line Status		
	Upstream	Downstream
Actual Data Rate	0	0
Attainable Data Rate	0	0
SNR Margin	0	0
Signal-level	0	0
Line Attenuation	0	0

Kein Benchmark möglich, LTE Signal da, aber keine Webseiten erreichbar:

Internet 



DSL-Verbindung getrennt

DSL-Link nicht synchron

LTE-Empfangsstärke 

LTE-parameter	
IMEI	864230020826135
IMSI	262014944116423
Device Status	Attached
SIM Card Status	SIM OK
Antenna Mode	Automatically select antenna, both antenna selete to external
Physical Cell ID	239
Cell ID	28385538
RSRP	-68
RSRQ	-10
Service Status	Effective service
TAC	13500

```
C:\Users\j...>ping 8.8.8.8

Ping wird ausgeführt für 8.8.8.8 mit 32 Bytes Daten:
PING: Fehler bei der Übertragung. Allgemeiner Fehler.

Ping-Statistik für 8.8.8.8:
    Pakete: Gesendet = 4, Empfangen = 0, Verloren = 4
    (100% Verlust),
```