

QUICK GUIDE LTE INSTANT

In order to be able to use your connection via mobile radio for a transitional period, please carry out the following steps.

1 Have you ordered a router with us?

To use the connection via Hybrid LTE, you need the Speedport Pro.


The Speedport Pro arrives at your home as quickly as possible.

2 Do you have the SIM card for the Speedport Pro?

You have received the SIM card for the Speedport Pro by post.


LTE reception is not possible without the SIM card.

3 Break the MicroSIM out of the carrier.

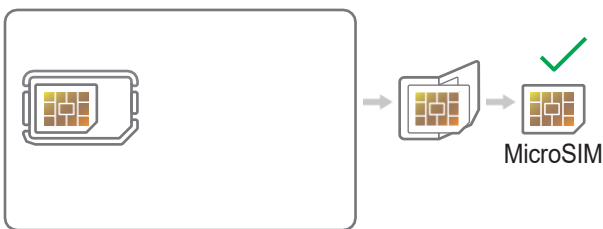


Remove the SIM card holder and break out the MicroSIM.

4 Insert the MicroSIM.

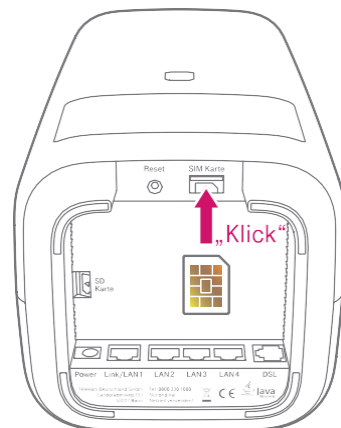

Insert the MicroSIM into the slot provided. Pay attention to the alignment of the bevelled corner and the audible click.

5 Wire the Speedport Pro and your telephones.

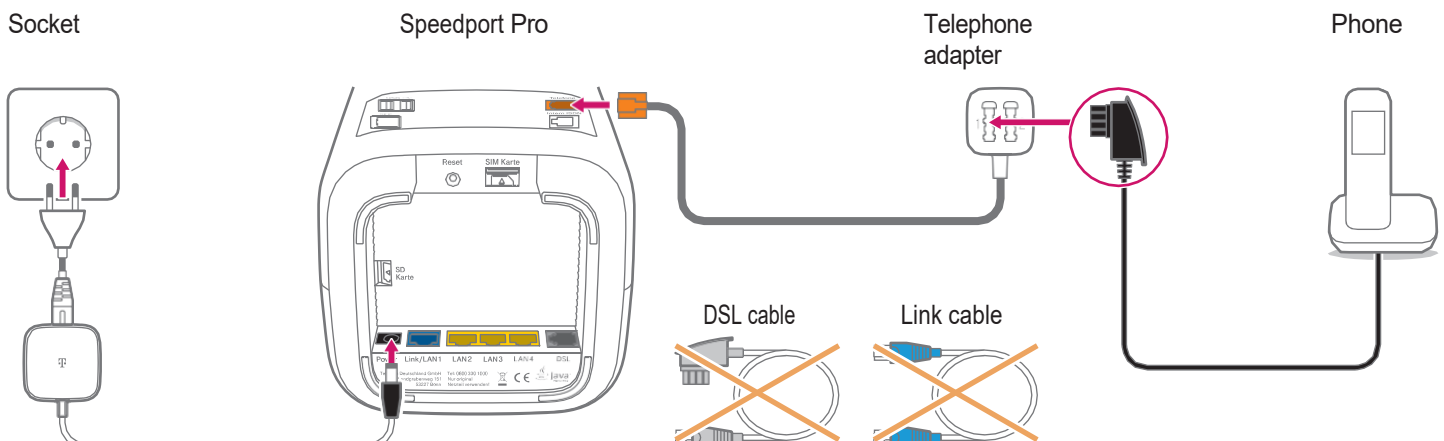



For an optimal connection, place the Speedport Pro as high as possible and unobstructed.




The DSL or link cable must not be connected (see step 9).

See "Connecting other phones" on page 3 for more tips.



6 Do not pay attention to the Laufflicht.

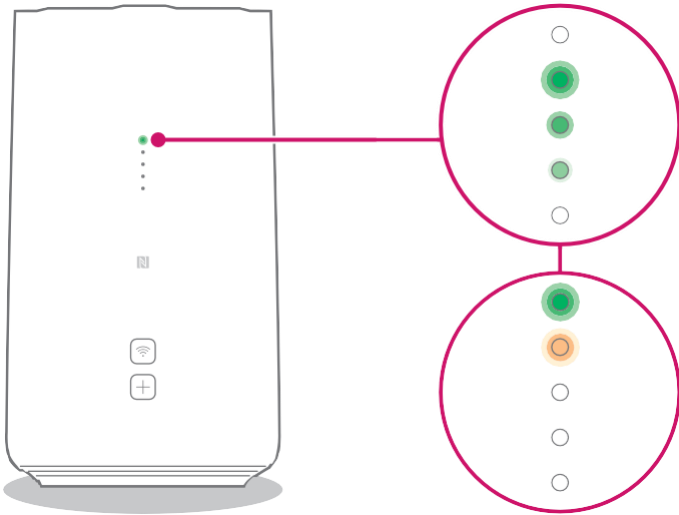

The Speedport Pro is prepared for setup.

Please wait as long as the Laufflicht is moving.




Max. 15 minutes

Your Speedport Pro is now online and you can make phone calls.

Proceed to step 7 to connect your devices.


7 Connect the Speedport Pro to your smartphone, tablet or computer.

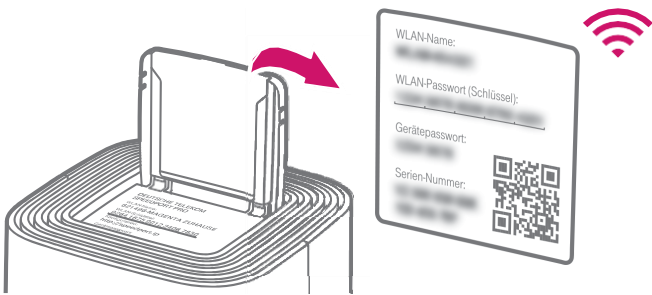

You will find the **WLAN** name and password or key in the lid compartment of the Speedport Pro.

Alternatively, you can also connect your computer **by cable** (yellow plug) to your Speedport Pro.

8 Set individual settings.

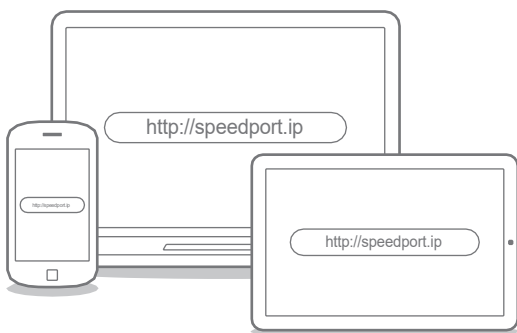

Enter **http://speedport.ip** in your browser and follow the instructions of the wizard.

9 This is how it continues.

You will receive the date for the activation of the fixed network line in a separate order confirmation.

Two to three days before the appointment, you will receive another quick guide for the final wiring with the DSL or Link cable.


WHAT ELSE IS IMPORTANT

Connect other phones

Connecting ISDN devices

You can connect an ISDN device directly to the Speedport Pro:


1. Connect your ISDN telephone or your ISDN telephone system to the "Internal ISDN" socket.
2. To ensure that everything works correctly, open the router menu in the browser via <http://speedport.ip> and enter your area code under "Telephony > Internal ISDN".
3. Close the router menu via "Logout".

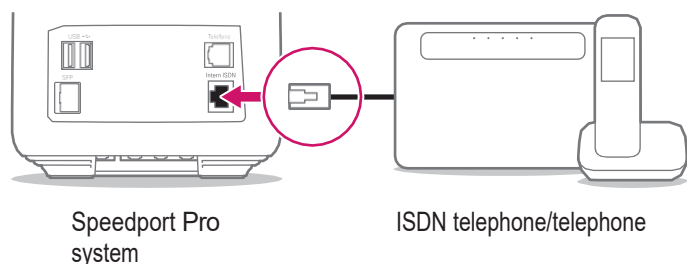

Connect Speedphone

Speedphones are connected to the Speedport Pro via radio. You recognise Speedphones on the "Speedphone" lettering on the handset of your telephone or on the charging station.



1. When switching on a new Speedphone, the display will prompt you to register the handset with the base station. Tap on "Register".
For a Speedphone that was already registered, select "Settings > Settings Router > Registration" in the menu of the Speedphone.
2. Then press the  button on the Speedport Pro.

No suitable help for your phone here?

Then please contact us.

Your SprachBox is switched on

From now on, the SprachBox will answer your calls when you are not available. You can check your messages from your connection, change settings or switch the box off and on again by calling **0800 33 02424** (free of charge).

Further information: www.telekom.de/sprachbox

Using SprachBox via app

Have your SprachBox messages sent to your smartphone now. With the app, you can easily listen to new messages and make settings from the road.

For Android: www.telekom.de/voicemail

For iOS: www.telekom.de/sprachbox-pro

When something does not work

Carry out one or more of the following steps:

1. Check the light indicators

Information on the light indicators finds in the router passport, which is inserted in the lid compartment.

2. Restart computer

Restart your computer.

3. Restart Speedport Pro

Press the -button on the back of your Speedport Pro.

4. Use operating instructions

You can find the operating instructions in your router packaging or digitally in the router menu at <http://speedport.ip> under the menu item "Manual" (you do not have to be online for this).

5. Improve WLAN

If your WLAN is slow or unstable, you can find useful tips here: www.telekom.de/wlan-hilfe

Tips and info

Do you want to further increase your password security?

Then assign personal and secure passwords, especially for the device password of the Speedport Pro, for Internet access and for WLAN, in order to be even better protected.

You will find information on this in the operating instructions for your Speedport Pro.

Information on data transmission

At www.breitbandmessung.de you can measure the data transfer rate on your connection immediately after setting it up.

Useful aids for getting started with your new Telekom

connection To help you get the most out of your product, we have put together the most important tips for beginners.

Everything at www.telekom.de/starter-tipps

Return of old appliances

You can find information on the return of your old equipment at www.telekom.de/altgeraet-zurueckgeben

Orders and contact

Do you need additional equipment and accessories, personal installation or advice?

This is how you can reach us:

0800 33 01000

www.telekom.de

www.telekom.de/email-contact

